


**Description:**

Eccosorb FS is a low-cost solid flat-sheet foam absorber which is available in various thicknesses and conductivities. Basically it is a uniform carbon-impregnated flexible foam material which can be easily glued together to suit various locations and applications. The NRL suffix refers to its compliance with the fire retardancy requirements of the U.S. Naval Research Laboratory (NRL) test 8093.




**Application:**

Typically ECCOSORB FS is used in Antenna, RCS and EW anechoic chambers to cover corners and difficult to cover areas. The optimal layout depends on the precise chamber dimensions and test configuration.




**Physical Properties:**

	FS-NRL
Standard	Blue
Base size (cm)	61 x 61
Max. Service Temperature(°C )	90
Power Handling	1.5 kW/m <sup>2</sup>
Fire Retardancy	NRL8093 Tests 1, 2 & 3, DIN 4102 Class B2, ISO 11925-2

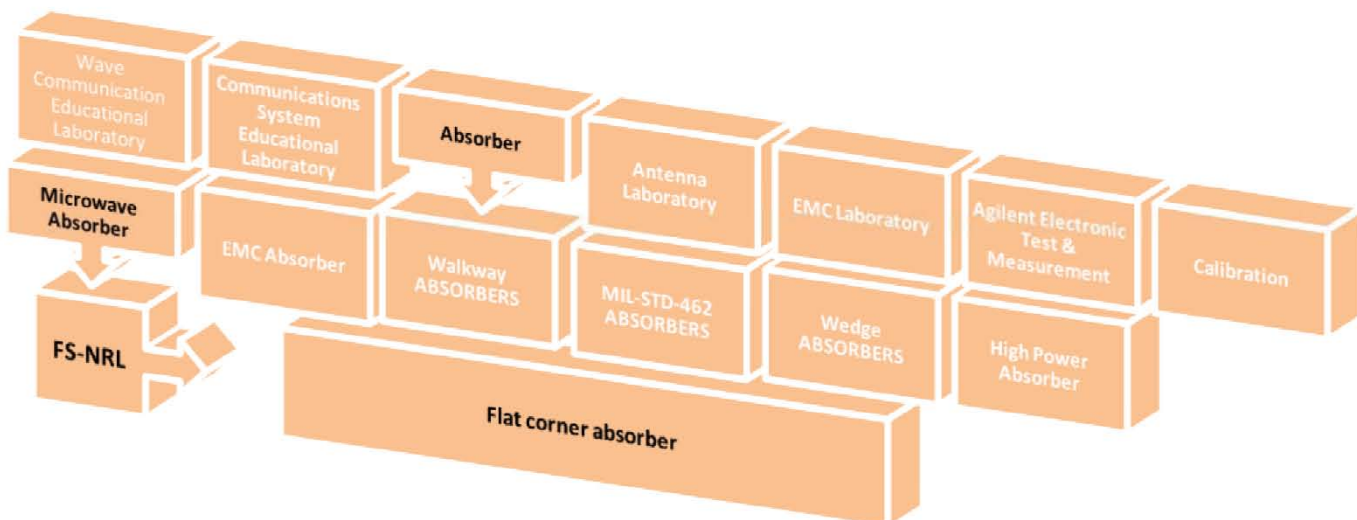

**Nominal dimensions of ECCOSORB FS-NRL:**



	Total height A (cm)
FS-50-NRL	5
FS-100-NRL	10
FS-150-NRL	15
FS-200-NRL	20

**Availability:**

ECCOSORB FS is available in different grades according to performance and base thickness of the pyramidal absorber that is combined with the FS absorber. ECCOSORB FS-NRL is a black material. The surfaces are painted with a fire retardant light blue paint. On special order, other colours, such as white, can be made available, or the pieces can be left unpainted.

**Instructions for use:**

The absorber can be mounted on surfaces in various ways: by the use of our contact adhesive ECCOSTOCK 13111, Velcro fasteners or Z-bars. In case of Velcro fasteners the absorber panels are provided with Velcro on the back. In case of Z-bars the absorber panels are delivered glued to a supporting plate with hooks. The material is designed for indoor use only.

